



# GENERATOR SET *powered by CUMMINS*

# M200C



Genset Model	Prime		Standby	
	kW	kVA	kW	kVA
M200C	145	182	160	200

Voltage	380/220	400/230	415/240
Amps	303	288	262

Ratings at 0.8 power factor

- 1) Ambient reference conditions: 1,000 mbar, 27°C, 30% relative humidity;
- 2) ESP: Standby Power Standby duty, operation under variable load, without over load;
- 3) PRP: Prime Power-Continuous duty operation, under variable load 24/24h-10% over load permissible 1 hour/12 hours;

## DIMENSION

Model		M200C
DIM (mm)	L	2350
	W	950
	H	1540
Weights (kg)		1750

## CONFIGURATION:

**Standard:** Engine, alternator, cooling system, Base frame (excluding fuel tank), shock absorber, air inlet system, control box (including mains floating charge), plastic fan blades (when the engine and water tank do not bring).

**Optional:** Base frame (including fuel tank), water jacket heater, fuel water separator, fuel heater, fuel level sensor (only supporting underframe tank), switch box (with switch), power switch, the water level sensor, motor anti condensation heater, automatic fueling system (only supporting base frame including fuel tank), battery frame.

**Accessories:** Silencer, bellow, exhaust silencing system accessories (with the matching engine), regular battery, starting cord assembly, data of gen-set, random tool (with the matching engine).

Engine Brand	Cummins
Engine Model	6CTA8.3-G2
Alternator Brand	Stamford
Alternator Model	UCI274G
Control System	DSE7320
Circuit Breaker Type	3 Pole MCCB
Frequency & Phase	50Hz & 3PH
Engine Speed: RPM	1500
Oil Capacity (L)	27.6
Fuel Consumption (L/hr)	42
Lubricant	15W40-CF4 Upgrade



## ENGINE SPECIFICATIONS

Brand	Cummins
Model	6CTA8.3-G2
Rated RPM	1500
Cylinder Arrangement	6 - Inline
Compression Ratio	17.3 :1
Bore and Stroke	114 x 135 mm
Fuel Consumption (L/h)	42
Displacement (L)	8.3
Aspiration	Turbo after cooled
Governor Type	Electronic Speed Control System
Fuel System	Electric unit pump
Engine Cooling System	Water cooled
Start Mode	DC 24V Electric Start

## ALTERNATOR SPECIFICATIONS

Brand	Stamford
Model	UCI274G
Number of Bearing	1
Insulation System	H/H
Power Factor	0.8
Protection	IP23
Frequency Fluctuation	≤±0.5%
Voltage Regulation	≤±1.0%
Telephone Interference	THF< 2%
Connecting Type	3 phase and 4 wires, "Y" type connecting
Alternator Efficiency	96 %
Rated Voltage	400/230
Voltage Control	AVR AS440
Excitation System	Self Excited

## GENERATOR SET OPTIONS

### Engine

- . Heavy Duty air filter
- . Water jacket heater 220/240

### Cooling

- . Antifreeze 50/50 (Ethylene glycol)

### Enclosure

- . Sound attenuated canopy

### Alternator

- . Alternator heater

### Control Panel

- . 3 pole Main Circuit Breaker

### Warranty

- . 5 years for Standby application
- . 2 years for Prime application

### Silencer

- . 9 dB attenuation industrial silencer
- . 25 dB residential – delivered loose



**TECHNICAL PARAMETERS OF CONTROL PANEL:**

<b>Brand</b>	<b>UK Deepsea</b>	<b>Model</b>	<b>7320</b>
--------------	-------------------	--------------	-------------

❖ **Main Feature**

Electronic J1939 (CAN) and nonelectronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant. The DSE7320 will also monitor the mains (utility) supply

❖ **Key Function**


- ▲ 4-Line back-lit LCD text display
- ▲ Charge alternator failure alarm
- ▲ Five key menu navigation
- ▲ Manual speed ctrl (oncompatible CAN engines)
- ▲ Front panel editing with PIN protection
- ▲ CAN and Magnetic Pick-up/Alt sensing
- ▲ Power save mode Customisable status screens
- ▲ Overload protection
- ▲ Support for up to three remote
- ▲ Reverse power (kW & kV Ar) protection
- ▲ 9 configurable inputs
- ▲ LED and LCD alarm indication
- ▲ Display units
- ▲ Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- ▲ Flexible sender inputs
- ▲ Load switching (load shedding and dummy load outputs)
- ▲ Configurable timers and alarms
- ▲ Automatic load transfer
- ▲ 3 configurable maintenance alarms



- ▲ Unbalanced load protection
- ▲ Multiple date and time scheduler
- ▲ Independent Earth Fault trip
- ▲ Configurable event log (250)
- ▲ USB connectivity
- ▲ Integral PLC editor ☆For more information, please visit the
- ▲ Easy access diagnostic page official website
- ▲ Tier 4 CAN engine support
- ▲ Compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines




## DIMENSION

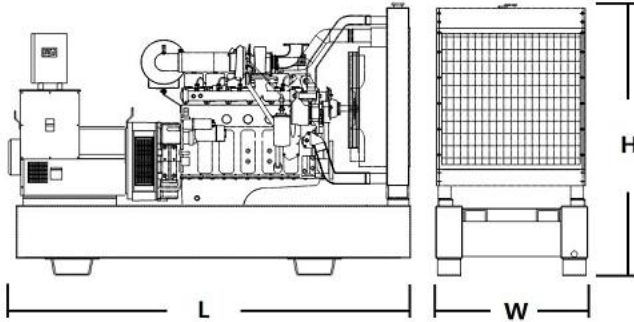

**OPEN TYPE (mm)**

L	W	H
<b>2350</b>	<b>950</b>	<b>1540</b>

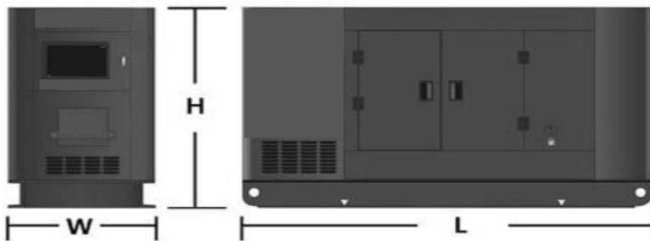

**SILENT TYPE (mm)**

L	W	H
<b>3265</b>	<b>1163</b>	<b>1858</b>

## DATA:

- Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V
- All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53inHg), air temperature 25°C (77°F), relative humidity 30%.
- Please contact with STAMFORD engineer for correct generator capacity selection when the load application can't meet with the standard reference.
- STAMFORD diesel generators comply with standards: ISO8528, ISO14000, ISO3046, GB755, BS5000, VDE0530, IEC34-1

## WARRANTY POLICY

- Guarantee for one year or 2000 hours (accord to whichever reach first) from ex-factory date. Wearing parts( filters), incorrect man-made operation, maintenance failures are excluded from the warranty policy